

Rhea

Dual Band Internal PCB Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 2.4 and 5.8 GHz bands
- ◆ Various cable/connector options
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	1/2 Wave Element
Frequency range	2.4 and 5.8 GHz
Peak gain	2.0 dBi
Polarisation	Linear
Return loss	-14 dB @ 2.4 GHz / -8.0 dB at 5.8 GHz
Power rating	10W
Cable / Connector	Various including MMCX, U.FL, SMA
Dimensions	50 x 16mm

Popular Ordering Options

FRHE35121-MR-16	Rhea with 160mm RG-178 and MMCX Connector
FRHE35121-UF-10	Rhea with 100mm cable and U.FL Connector

www.ead-ltd.com

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 825044
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com


EAD 
embedded antenna design ltd

Rhea | Dual Band Internal PCB Antenna

Return Loss

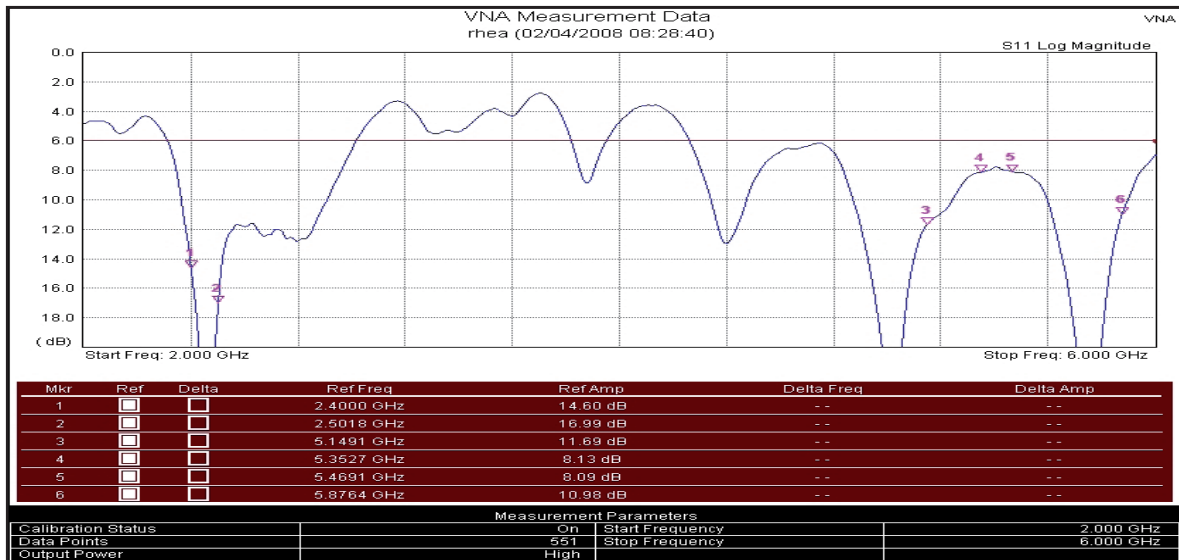

Outline Drawing

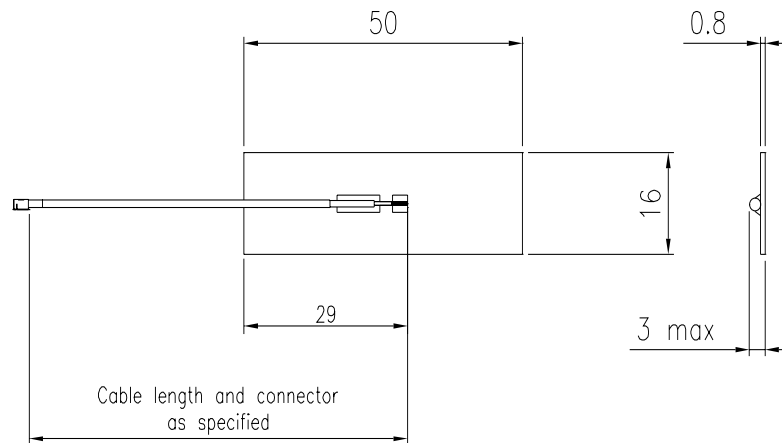

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com